

Indoor

SPAX[®]



For solid wood flooring





Application example



MULTI Head




Fixing thread



4CUT



**Flat countersunk head,
T-STAR plus**
MULTI Head, 4CUT,
case hardened, slide-coated
Zinc yellow passivated A2L

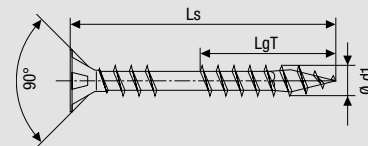

| Dimensions [mm] | | | | Packaging unit | SPAX No. |
|-----------------|-----------------|---------------------------|------------------------|-------------------|---------------|
| Thread Ø d1 | Length total Ls | Length partial thread LgT | Bit size T-STAR plus T | SPAX BOX [pieces] | |
| 4.5 | 50 | 21.5 | 20 | 500 | 0541020450505 |
| | 60 | 26.5 | 20 | 500 | 0541020450605 |
| | 70 | 31.5 | 20 | 500 | 0541020450705 |
| | 80 | 31.5 | 20 | 200 | 0541020450805 |

The flooring screw

The **flooring screw** can be sunk cleanly and flush. In doing this, the *MULTI Head* effectively mills into wood and thanks to its *T-STAR plus* with recess T20 guarantees a high force transmission and a secure seating of the tool.

The fixing thread allows a solid and permanent connection of two wood components. It effectively reduces creaking caused in the floor structure. The *4CUT* effectively minimises wood splitting.


The special characteristics of the flooring screw:

- *MULTI Head* for flush sinking. Mills in wood.
- *T-STAR plus* T20
- The fixing thread allows a solid and permanent connection of two wood components
- Ground serrations
- *4CUT*



Milling head, T-STAR plus

CUT point, case hardened, slide-coated

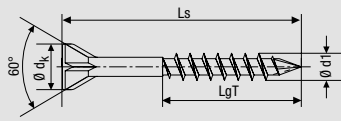

Zinc yellow passivated A2L

| Dimensions [mm] | | | | Packaging unit | SPAX No. |
|-----------------|-----------------|---------------------------|------------------------|-------------------|----------------|
| Thread Ø d1 | Length total Ls | Length partial thread LgT | Bit size T-STAR plus T | SPAX BOX [pieces] | |
| 3.5 | 35 | 20 | 10 | 500 | 35703503203021 |
| | 45 | 29 | 10 | 500 | 35703503201021 |
| | 55 | 36 | 10 | 500 | 35703503202021 |



Application example



Small 60° milling head



CUT point



The solid wood flooring screw

The ideal screw for laying solid wood flooring. Thanks to the special screw geometry including the *CUT point* material splitting is reduced effectively.

The characteristic screw point ensures an immediate grip, cutting ribs facilitate sinking, and the small 60° milling head allows the SPAX to pull into the material in a particularly easy way.

Perfect connection of tongue and groove.

The special characteristics of the solid wood flooring screw:

- Small 60° milling head
- T-STAR plus T10
- Partial thread
- SPAX typical ground serrations
- CUT point
- Includes 1 SPAX-BIT T-STAR plus T10 per SPAX Box

500

3,5x45

4 003530 138126

CUT

A2L

T10

35703503201021 incl. Bit





The quickest way
to us:



SPAX International GmbH & Co. KG

ALTENLOH, BRINCK & CO - GRUPPE

KÖLNER STRASSE 71-77 · D-58256 ENNEPITAL · GERMANY

TEL + 49-23 33-799-0 · FAX + 49-23 33-799-199

info@spax.com · www.spax.com

